


Windings on Toroidal Cores

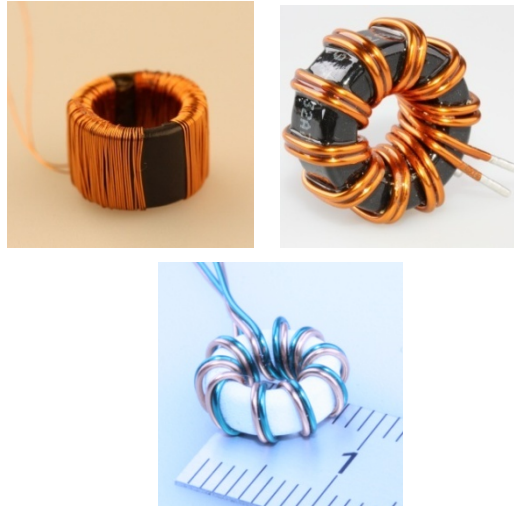

Variants

- Bifilar/multiple windings
- Tin-plated ends
- With strands and connectors
- Housing SMD/pins
- Varnished/sealed
- Dimensions 3 to 50 mm

Wires

- Varnished copper wires
- RF strands, insulated strands

Cores

- Ferrites starting at 1.5 mm

Know-how

- Miniaturization
- Ferritic materials
- Specification of chokes, transmitters, transformers
- Toroidal core winding equipment

Capacity

- 0.2 million/year

Applications

- Switched-mode power supplies
- Smoothing and filter chokes
- Radio interference suppression
- Oscillating circuits
- Pulse and broadband transmitters
- Transformers, inductances

Packaging

- Trays

Values specified are typical, but not binding.